


Mini Portable Thermal Receipt Printer

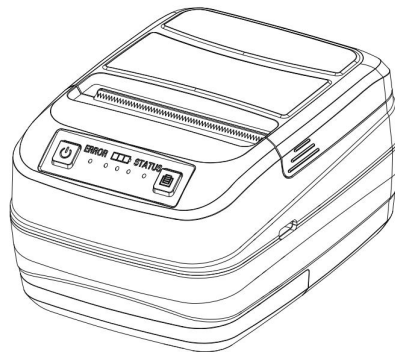

Parameters:

Item		Parameter
Print parameter	Printing Method	Thermal Line
	Printing Width	48mm
	Resolution	384 dots/line (8dots/mm, 203dpi)
	Printing Speed	70 mm/S(MAX)
	Interface	USB+Bluetooth
	Line spacing	3.75mm (Can adjust line spacing by command)
	Line No.	Font A:32 character /Line Font B:42 character/Line
	Character Size	ANK character, Font A: 1.5×3.0mm (12×24 dots) Font B: 1.1×2.1mm (9×17 dots)
Bar code character	Extended character set	PC437/Katakana/PC850/PC860/PC863/PC865/WestEurope/Greek/Hebrew/EastEurope/Iran/WPC1252/PC866/PC852/PC858/IranII/Latvian/Arabic/PT151,1251/PC737/WPC/1257/ThaiVietnam/PC864/PC1001/(Latvian)/(PC1001)/(PT151,1251)/(WPC1257)/(PC864)/(Vietnam)/(Thai)
	Bar code	1D.Bar code: UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)CODE39/ITF/ CODABAR/CODE93/CODE128 2D.Bar code: QRCODE
Graphics printing	Graphics printing	Supports bitmap download and print (support each bitmap size Max.8K, download up to 5pcs)
Power saving Mode	Smart power saving	Support
	Variable speed printing	Support
	Consumption	Support
	Dormancy	Support
Detection	Sensor	Lack of paper detection
Indicator	Power Display	Support

	Charge Indicator	Support
	Lack of paper	Support
Paper	Type	Thermal
	Width	57.5±0.5mm
	thickness	≤0.12mm
	Diameter	≤50mm
	Feed	Easy (Clamshell feed)
Print commands	Commands	ESC/POS
Power	Type	Rechargeable Lithium polymer battery
	Capacity	2000mAh
	Charger	5.0V/1A
Buffer	Input	4KB
	NV Flash	40KB
Physical features	Weight	200G
	Dimension	121*82*58(MM)
Environment	Operating	Temp: 5 ~ 45°C, Humidity: 10 ~ 80%
	Storage	Temp: -10 ~ 50°C , Humidity: 10 ~ 90% (No Dew)
Reliability	Print head life	50KM (Printing Density≤12.5)
Software	Driver	Android,IOS,Linux,Windows